

**NONPROVISIONAL PATENT APPLICATION**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**OLIFF & BERRIDGE, PLC**  
**P.O. Box 19928**  
**Alexandria, Virginia 22320**  
**Telephone: (703) 836-6400**  
**Facsimile: (703) 836-2787**

Attorney Docket No.: 101473

Date: February 3, 1999

**BOX PATENT APPLICATION**

**NONPROVISIONAL APPLICATION TRANSMITTAL**  
**RULE §1.53(b)**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the nonprovisional patent application

For (Title): HARDWARE SIMULATION SYSTEMS AND METHODS FOR VISION INSPECTION SYSTEMS

By (Inventors): Richard M. WASSERMAN

- ☒ Formal drawings (Figs. 1-4B; 5 sheets) are attached.  
☒ A Declaration and Power of Attorney is filed herewith.  
☒ An assignment of the invention to MITUTOYO CORPORATION is filed herewith.  
☐ An Information Disclosure Statement is filed herewith.  
☐ A statement to establish small entity status under 37 C.F.R. §§1.9 and 1.27 is filed herewith.  
☐ A Preliminary Amendment is filed herewith.  
☐ Please amend the specification by inserting before the first line the sentence --This nonprovisional application claims the benefit of U.S. Provisional Application No. \_\_\_\_\_, filed \_\_\_\_\_.--  
☐ Priority of foreign application(s) No. \_\_\_\_\_ filed \_\_\_\_\_ in \_\_\_\_\_ is claimed (35 U.S.C. §119).  
☐ A certified copy of the above corresponding foreign application(s) is filed herewith.  
☒ The filing fee is calculated below:

**CLAIMS IN THE APPLICATION AFTER ENTRY OF ANY PRELIMINARY AMENDMENT NOTED ABOVE**

FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	43 - 20	= 23
INDEP CLAIMS	4 - 3	= 1
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

\* If the difference is less than zero, enter "0".

**SMALL ENTITY**

RATE	FEE
	\$ 380
x 9 =	\$
x 39 =	\$
+130 =	\$
TOTAL	\$

OR

OR

OR

OR

OR


OR

**OTHER THAN A SMALL ENTITY**

RATE	FEE
	\$ 760
x 18	\$ 414
x 78	\$ 78
+260	\$
TOTAL	\$ 1252

- ☒ Check No. 66153 in the amount of \$1252.00 to cover the filing fee is attached. Except as otherwise noted herein, the Commissioner is hereby authorized to charge any other fees that may be required to complete this filing, or to credit any overpayment, to Deposit Account No. 15-0461. Two duplicate copies of this sheet are attached.
- ☐ This application is entitled to small entity status. DO NOT charge large entity fees to our Deposit Account.

Respectfully submitted,

  
James A. Oliff

Registration No. 27,075

James E. Howard  
Registration No. 39,715

U.S. PTO  
09/243689  
02/03/99

# HARDWARE SIMULATION SYSTEMS AND METHODS FOR VISION INSPECTION SYSTEMS

## BACKGROUND OF THE INVENTION

### 1. Field of Invention

5 This invention is directed to methods and systems that simulate images produced by a vision system. More particularly, this invention is directed to methods and systems that generate a synthetic image that accurately approximates an image produced by an automated vision inspection system.

### 2. Description of Related Art

10 A wide variety of non-contact computer-vision-based systems exist that recognize or measure key features of parts or materials in a manufacturing environment. Many of these systems have a "training" or "programming" mode. In the programming mode, the system receives instructions regarding how to recognize or measure a part. This programming mode results in a set of instructions that are  
15 automatically repeated by the system. These instructions may be organized as a program in a general purpose scripting language or as a macro sequence. Stored program instruction sequences in either scripting or macro languages are known as part programs. The sequence of learning or training a part program is known as part programming.

## SUMMARY OF THE INVENTION

20 Off-line programming software tools are popular for traditional, non-image-based coordinate measuring machines and robots. Off-line programming tools assist a programmer in selecting machine instructions to include in a program for the non-image-based coordinate measuring machines and robots. However, these off-line  
25 programming software tools do not account for problems experienced when forming optical images through physical lens systems because such concerns are not present in traditional, non-image-based coordinate measurement machines or robots. Therefore, these known off-line programming software tools are inadequate for any machine that includes a machine vision system and totally unsuitable for modern image-based  
30 inspection and/or motion systems.

The systems and methods of the invention use 3D graphical models of workpieces to simulate the images produced by the physical hardware of a vision inspection system. An exemplary embodiment of the system and method of this invention provides these synthetic images at a speed which approximates the real-time generation of images in a real vision inspection system. The simulation systems and methods of this invention produce synthetic video images that are comparable to the images that are captured by a camera looking through a lens at a workpiece in a vision inspection system.

The simulation systems and methods of this invention may be integrated with a user interface from machines which include a machine vision system, and especially with a user interface from a vision inspection system, to provide an off-line programming environment. The term "off-line programming" describes the creation of a part program without interfering with the ongoing operation of a physical vision inspection system.

The methods and systems of the invention separately provide vision simulation systems that allow vision system designers to develop software-only versions of vision inspection systems. Such software-only implementations will present the same user interface to operators as would be presented by a corresponding physical vision inspection station. Hardware emulation modules in the systems and methods of this invention simulate physical components of the visual inspection stations, such as cameras, lighting, lenses and motion control platforms. The simulation systems and methods of this invention generate synthetic images based on state models of the vision systems and computer-aided-design models of workpieces to be measured. The computer-aided-design models of workpieces may be provided by conventional commercial CAD packages, such as pro/ENGINEER from Parametric Technology Corporation, Waltham, MA 02453, and may coincide with the CAD data files which govern manufacturing of actual workpieces which would eventually be placed under the actual vision inspection station.

The synthetic images generated by the systems and methods of this invention may be used in place of the video captured by a camera in a hardware-based vision system. The systems and methods of this invention allow designers to readily develop an off-line version of an inspection system by replacing hardware-based software

subsystems with subsystems that communicate with virtual components of a vision simulation engine. Operators are able to modify parameters in the virtual inspection system and immediately see the results as a change in the synthesized image. Because the inspection system simulation systems and methods of this invention are usable with existing vision inspection system user interfaces, a user may gain familiarity with the user interface prior to interacting with an actual physical vision inspection system.

The inspection system simulation systems and methods of this invention reduce system downtime due to creating new inspection part programs. The systems and methods of this invention are also able to improve operator training and to provide improved tools for off-site sales and marketing of vision inspection systems.

These and other features and advantages of this invention are described in or are apparent from the following detailed description of the exemplary embodiments.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The preferred embodiments of this invention will be described in detail, with reference to the following figures, wherein:

Fig. 1 is a block diagram of one exemplary embodiment of a hardware-based vision inspection system;

Fig. 2 is a block diagram of the exemplary embodiment of the vision inspection system using one exemplary embodiment of an inspection system simulation system in accordance with this invention;

Fig. 3 is a block diagram showing in greater detail one exemplary embodiment of a vision simulation engine in accordance with this invention; and

Figs. 4A and 4B are a flowchart outlining one exemplary embodiment of a method for rendering synthesized images in accordance with this invention.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Fig. 1 is a block diagram of one exemplary embodiment of a physical vision inspection system 10. The vision inspection system 10 includes a vision inspection control system 12. The vision inspection control system 12 includes a user interface subsystem 14, a data processing subsystem 16 and a hardware interface 20. The hardware interface 20 includes a light control subsystem 22, a framegrabber subsystem 24, a lens control subsystem 26 and a motion control subsystem 28. The hardware interface 20 communicates with the vision system hardware components 30.

In particular, the vision system hardware components 30 includes lighting hardware 32, framegrabber 34, lens hardware 36 and motion control hardware 38. The framegrabber 34 may include an internal or external framegrabber mechanism to produce still or real-time digital representations of a scene viewed by a monochrome or color camera. The camera and the framegrabber 34 combination described herein is intended to include both analog and digital camera configurations. For example, a digital camera may include an integral framegrabber.

Each of the physical hardware systems 32-38 of the vision system hardware components 30 represent one or more physical components of a typical machine vision inspection system. The systems and methods of this invention use graphical and physical modeling techniques to replace all of these components with a virtual model of the vision system hardware components 30.

One example of a commercially available vision inspection system which corresponds to the vision inspection system of Fig. 1, is the Quick Vision series of vision inspection machines available from Mitutoyo MTI Corporation Aurora, IL. One example of a commercially available vision inspection control system including a user interface subsystem which corresponds to vision inspection control system 12 and user interface subsystem 14 of Fig. 1, is the QVPak operating software for the Quick Vision series of vision inspection machines available from Mitutoyo MTI Corporation Aurora, IL.

Fig. 2 shows one exemplary embodiment of a vision simulation system 100 according to this invention, comprising a vision inspection control system 110 and one exemplary embodiment of a vision system hardware components simulation system 140 according to this invention. The vision inspection control system 110 is identical to the vision inspection control system 12 of Fig. 1 and includes a user interface subsystem 114, a data processing subsystem 116 and a hardware interface 120. The hardware interface 120 includes a light control subsystem 122, a framegrabber subsystem 124, a lens control subsystem 126 and a motion control subsystem 128.

The vision system hardware components simulation system 140 is preferably implemented on a programmed general purpose computer. However, the vision system hardware components simulation system 140 can also be implemented on a

special purpose computer, a programmed microprocessor or microcontroller and peripheral integrated circuit elements, an ASIC or other integrated circuit, a digital signal processor, a hardwired electronic or logic circuit such as a discrete element circuit, a programmable logic device such as a PLD, PLA, FPGA or PAL, or the like.

5 In general, any device, capable of implementing a finite state machine that is in turn capable of implementing the flowcharts shown in Figs. 4A and 4B, can be used to implement the vision system hardware components simulation system 140.

10 The hardware interface 120 communicates with the vision system hardware components simulation system 140 over links 142 and 144. The vision system hardware components simulation system 140 includes a vision inspection system simulation processing subsystem 146 which communicates with a configuration subsystem 148, and an external view 150.

15 It should be appreciated that, if the vision system hardware components simulation system 140 is implemented in hardware or remotely from the vision inspection control system 110, the links 142 and 144 can be any now known or later developed device or system for connecting the vision inspection control system 110 to the vision system hardware components simulation system 140, including a direct cable connection, a connection over a wide area network or a local area network, a connection over an intranet, a connection over the Internet, or a connection over any  
20 other distributed processing network or system. In general, the links 142 and 144 can be any known or later developed connection system or structure usable to connect the vision inspection control system 110 to the vision system hardware components simulation system 140.

25 If the vision system hardware components simulation system 140 is implemented locally to the vision inspection control system 110, such as by a software application program, the links 142 and 144 are software structures that route data and control signals between the vision inspection control system 110 and the vision system hardware components simulation system 140. The vision system hardware components simulation system 140 receives control data over the link 142  
30 from the vision inspection system simulation system 110 and sends synthetic image data over the link 144 to the vision inspection control system 110.

The configuration subsystem 148 stores models of a virtual world and includes a systems lighting model, a motion control model, a workpiece model, and lens and camera configuration data that are used by the processing subsystem 146 to produce still and/or real-time synthetic images.

5 As shown in Fig. 2, the vision system hardware components simulation system 140 is integrated with the vision inspection control system 110, which is intended to drive the physical vision system hardware components 30. The vision system hardware components simulation system 140 is a hardware- or software-based emulation system that replaces the physical cameras, lenses, lights, stages, etc. of the  
10 physical vision system hardware components 30 shown in Fig. 1.

The vision system hardware components simulation system 140 is capable of producing images of a simulated vision inspection target at differing heights relative to a virtual optical system and camera. These synthetic images, which may include out-of-focus images and lighting effects, facilitate rapid and intuitive off-line  
15 programming.

The vision system hardware components simulation system 140 can also produce a three-dimensional external view 150 of the entire simulated vision inspection system. The external view approximates what is seen by the user when physically viewing a physical vision inspection system. Such an external view  
20 provides many important spatial cues to a system operator to further facilitate rapid and intuitive off-line programming.

A user of the systems and methods of this invention can import and fix computer-aided design (CAD) models of workpieces onto a virtual stage of the vision system hardware components simulation system 140 by importing and storing CAD  
25 models in the configuration subsystem 148. Real-time, synthetic digital images of the stage and the workpiece are then created and provided to the vision inspection control system 110 by the vision system hardware components simulation system 140. Users may then inspect the simulated workpieces on the virtual vision inspection machine simulated by the vision system hardware components simulation system 140 to select  
30 instructions for part programs that will run on the physical vision inspection system that is being simulated by the vision system hardware components simulation system 140.

The processing subsystem 146 creates synthetic images by taking at least one of the following factors into account: camera position and view; light source positioning; orientation of the workpiece relative to the stage; current position and orientation of the stage relative to the camera; lens subsystem parameters, such as

5 focal length; the geometry of the modeled lens system; the optical effects produced by the lens and lighting systems; the optical properties of the workpiece; and the physical properties of the workpiece.

Fig. 3 shows another exemplary embodiment of the vision system hardware components simulation system 140 of the vision simulation system 100 in accordance with the invention. As shown in Fig. 3, in this exemplary embodiment, the vision

10 system hardware components simulation system 140 includes an input/output interface 200 and a rendering engine 202. The interface 200 includes subsystems that store the position of the virtual stage, the parameters for the virtual lens system and the parameters for the lighting system. The parameters of the virtual lighting system

15 include the magnitude, the color, the orientation and the type of each virtual light source in the system. The parameters of the virtual lens system include magnification, field of view, focal length and depth of field of the simulated lens system.

The vision system hardware components simulation system 140 also includes a lighting model 206 which models light emanating from each virtual lighting source.

20 The lighting model 206 describes the light from each virtual lighting source and includes information regarding position, orientation, magnitude, color and type of light from each light source.

The vision system hardware components simulation system 140 also includes a virtual world model 208, a static environment model 210, a virtual stage model 212

25 and a component model 214. The models 208-214 record and update the geometrical and physical model descriptions of a virtual stage and virtual workpieces. Each component is described in the corresponding model 208-218 in a scene hierarchy consistent with current graphical surface modeling techniques. Each model is a set of polygons connected at a collection of common nodes. Each node contains

30 information such as position, color, material information, and texture coordinates. Each object may include one or more texture maps to be applied to the surface faces.



The virtual world model 208 stores a complete current 3D model of the virtual stage table, the virtual movable stage components and all of the virtual workpieces on the virtual stage. This virtual world model 208 is constructed from a hierarchy of components that include the static environment model 210, the virtual stage model 212 and the component model 214, including the position and orientation of the workpiece on the stage. When the virtual stage moves relative to the virtual stage table, the workpieces on the stage translate in a global coordinate system accordingly.

The vision system hardware components simulation system 140 also includes a lens system model 216 which stores virtual lens system data, such as field of view and perspective. The lens system model 216 transmits lens system data to the rendering engine 202.

The foregoing description assumes a typical case for many machine vision systems, where the camera is fixed in a global coordinate system, and the workpieces are moved relative to the camera by means of a moving stage component, for example an X-Y table, a conveyor belt, or the like. In other cases, where the camera and optical system are mounted in a gantry configuration, or on the end of a robotic arm, the camera and optical system move relative to the global coordinate system, and the workpiece remains fixed relative to the global coordinate system. In the later case, the lighting model 206 should include the lighting position and orientation relative to the workpiece and the lens system, and the lens system model 216 should include the lens system position and orientation relative to the workpiece(s), stage, static model and world model. In the later case, the stage model 212 has no moving features, and may be included in the static model. In any case, the crucial data for image simulation is the relative position and orientation of the optical system, the workpiece(s) and the lighting system, and one skilled in the art can allocate relative position data for these elements to the appropriate models according to any of the well-established methods for relating objects in a set of local and global coordinate systems.

The vision system hardware components simulation system 140 also includes a memory 218 which stores the two-dimensional image.

The vision system hardware components simulation system 140 also includes a rendering engine 202. Examples of such a rendering engine is OpenGL or Direct3D. OpenGL is an open standard for 3D graphical rendering which is described

in OpenGL Reference Manual, OpenGL Architecture Review Board, Addison-Wesley  
 Developers Press, Reading, MA, 1996. Direct3D is a component of the DirectX  
 system of tools distributed by Microsoft Corporation in conjunction with their  
 Windows™ operating system. The rendering engine 202 accepts as input the 3D  
 5 polygonal model stored in the virtual world model 208, the lens model 216 and the  
 lighting model 206. The rendering engine 202 may be any system which produces a  
 two-dimensional image and a depth map given a three-dimensional model, using  
 Gouraud shading, raytracing, etc. The rendering engine 202 receives the 3D  
 polygonal model and lighting data from the lighting model 206 and the virtual world  
 10 model 208, respectively.

The rendering engine 202 creates two-dimensional image data as viewed  
 through an ideal pinhole lens system. The 2D image data includes a two-dimensional  
 mapping which stores the distance of each pixel in the image map from the virtual  
 camera. The rendering engine 202 also generates the three-dimensional external view  
 15 150 of the virtual world (shown in Fig. 2). As described above, the three-dimensional  
 external view 150 emulates a view of the system as would be seen by an operator of  
 the vision inspection system.

The two-dimensional camera image data does not simulate real world camera  
 information. The two-dimensional camera image data has an infinite depth of focus  
 20 as if it were created using a perfect pinhole camera. This does not accurately simulate  
 the view of real machine vision inspection systems, which often have very small  
 depths of field. Therefore, the vision system hardware components simulation system  
 140 also includes a lens effects processing engine 204. The lens effect processing  
 engine 204 receives the two-dimensional camera image data including the depth per  
 25 pixel data from the rendering engine 202. The lens effects processing engine 204  
 modifies the camera image in accordance with the virtual lens parameters. The lens  
 effects processing engine 204 outputs a two-dimensional image. This two-  
 dimensional image takes into account the virtual optical geometry of the system. One  
 example of a lens effects processing engine is described in A Lens and Aperture  
 30 Camera Model for Synthetic Image Generation, Computer Graphics, vol. 15, no. 3,  
 pp. 297-305, August 1981.

It should be understood that the lens effects engine 204 and the rendering engine 202 may form portions of a single processor or may be separate processors. Moreover, the rendering engine 202 and the lens effects engine 204 can be combined into a single rendering and lens effects engine. Such a combined rendering and lens effects engine could be used, for example, with ray tracing rendering to follow each ray through the optical system.

It should be understood that each of the models shown in Fig. 3 can be implemented as portions of a suitably programmed general purpose computer. Alternatively, each of the models shown in Fig. 3 can be implemented as physically distinct hardware circuits within an ASIC, or using FPGA, a PDL, a PLA or a PAL, or using discrete logic elements or discrete circuit elements. The particular form each of the models shown in Fig. 3 will take is a design choice and will be obvious and predicable to those skilled in the art.

Figs. 4A and 4B are a flowchart outlining one exemplary embodiment of a method for rendering a vision simulation of a vision inspection system in accordance with this invention. As shown in Fig. 4A, the control routine starts at step S100 and continues to step S102. In step S102, components of the virtual world, such as a table, camera, lighting, etc. are initialized. Then, in step S104, the models of the workpieces are added to the virtual world. Next, in step S106, a stage position is determined. Control then continues to step S108.

In step S108, the positions of the virtual stage and of all workpieces on the virtual stage are updated. Next, in step S110, the virtual world model is updated based on other system parameters, such as lighting, lenses, etc. Then, in step S112, the virtual world is rendered to form a two-dimensional camera image and a corresponding map of pixel depth data. Control then continues to step S114, which is shown in Fig. 4B. Then, in step S114, a determination is made whether lens effects are required. If lens effects are required, control continues to step S116.

Alternatively, if lens effects are not required, control jumps directly to step S118. In step S116, virtual lens effects are applied to the simulated image. Next, in step S118, the virtual camera view is provided to a vision inspection control system. Control then continues to step S120.

In step S120, a determination is made whether a virtual external view is required. If a virtual external view is required, control continues to step S122. If a virtual external view is not required, control jumps directly to step S124. In step S122, the virtual external view of the system is rendered. Then, in step S124, a determination is made whether the vision simulation engine should be halted. If the vision simulation engine is to be halted, control continues to step S126. If the vision simulation system is not to be halted, control jumps back to step S106. In step S126, the vision simulation engine is stopped.

It should be appreciated that steps S112-S116 can be combined into a single step that both renders the image and simultaneously adds any lens effects to the image. For example, in a ray tracing system, as each ray is used to render a portion of the image, the path of that ray is followed through the optical system to account for any lens effects.

It should be further appreciated that the flowchart outlined in Figs. 4A and 4B is one exemplary embodiment of a more-general method for rendering a simulated image from a machine vision system. The machine vision system can be a vision inspection system or a vision system attached to some other machine, such as a robot. This method for rendering the simulated image includes generating a simulated image of a virtual world based upon a first model that characterizes or represents at least one object in the virtual world and a second model that characterizes or represents an optical system, and providing the simulated image to a machine vision control system. The machine vision control system can be an inspection program generation system, such as a system for generating a part program for the vision inspection system described above, or a motion command generation system, such as a system for generating motion commands for a robot having a machine vision system.

Operators are able to modify parameters in the machine vision system and immediately see the results as a change in the synthesized or simulated image. Because the machine vision simulation systems and methods of this invention are usable with existing machine vision system user interfaces, such as vision inspection system user interfaces, a user may gain familiarity with the machine vision user interface prior to interacting with an actual physical vision inspection system.

While this invention has been described with the specific embodiments outlined above, many alternatives, modifications and variations are apparent to those skilled in the art. Accordingly, the preferred embodiments described above are illustrative and not limiting. Various changes may be made without departing from the spirit and scope of the invention.

5

100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

WHAT IS CLAIMED IS:

1. A vision system hardware component simulation system for machine vision, comprising:
  - a first model representing at least one object;
  - a second model representing an optical system; and
  - a processor that generates an image of a virtual world containing the at least one object based upon the first model and the second model.
2. The vision system hardware component simulation system of claim 1, wherein:
  - at least one of the first and second models includes information which characterizes the relative orientation and position of the corresponding at least one object and the optical system;
  - the image of the virtual world comprising an image of the at least one object as seen through the optical system.
3. The vision system hardware component simulation system of claim 1, further comprising at least one additional model representing at least one of a stage, a workpiece fixture and a lighting system, wherein the processor further generates the image of the virtual world based on the at least one additional model.
4. The vision system hardware component simulation system of claim 3, wherein the at least one additional model further represents a stage table.
5. The vision system hardware component simulation system of claim 3, wherein the at least one additional model is a lighting system model that represents at least one of a magnitude, a color, a type and an orientation of at least one lighting source.
6. The vision system hardware component simulation system of claim 3, wherein the first model comprises a representation of at least one of a position and an orientation of the at least one object relative to the stage.
7. The vision system hardware component simulation system of claim 1, wherein the second model comprises:
  - a lens system model; and
  - a lighting model.

8. The vision system hardware component simulation system of claim 1, wherein the first model comprises at least one of:

- a world model;
- a static model;
- 5 a stage model; and
- a component model.

9. The vision system hardware component simulation system of claim 8, wherein the world model is at least partially constructed from at least one of the static model, the stage model and the component model.

10 10. The vision system hardware component simulation system of claim 1, wherein the processor comprises:

- a rendering engine; and
- a lens effects engine.

11 11. The vision system hardware component simulation system of claim 1, wherein the processor comprises a rendering and lens effect engine.

12. The vision system hardware component simulation system of claim 1, wherein the second model represents an optical system having an infinite depth of field.

13 13. The vision system hardware component simulation system of claim 1, further comprising a control instruction generation system.

14. The vision system hardware component simulation system of claim 13, wherein the control instruction generation system comprises an inspection program generation system.

15 15. The vision system hardware component simulation system of claim 13, wherein the control instruction generation system comprises a motion command generation system.

16. The vision system hardware component simulation system of claim 1, wherein the second model characterizes an image capture system and a lens system.

17 17. The vision system hardware component simulation system of claim 16, wherein the second model characterizes at least one of an aperture, a focal length, an image magnification, and an optical system geometry of the lens system.

18. The vision system hardware component simulation system of claim 16, wherein the second model characterizes at least one of an imaging system pixel size and an imaging system pixel spacing of an image capture system.

19. The vision system hardware component simulation system of claim 1, further comprising a user interface that presents the image.

20. The vision system hardware component simulation system of claim 1, further comprising a user interface includes means for modifying at least one of the first and second models.

21. The vision system hardware component simulation system of claim 1, further comprising a user interface for a machine vision inspection system to simulate, the user interface simulating at least one operation of the machine vision inspection system independent of at least one component of the machine vision inspection system.

22. A method for simulating images based on the characteristics of at least one machine vision hardware component, comprising:

generating a simulated image of a virtual world containing at least one object based upon a first model that characterizes the at least one object and a second model that characterizes an optical system; and

providing the simulated image to a machine vision control system.

23. The method of claim 22, wherein generating the simulated image based on the first and second models comprises:

processing position data characterizing a relative position and orientation of the at least one object and the optical system;

processing component data; and

processing optical system parameters.

24. The method of claim 23, wherein generating the simulated image based on the first and second models further comprises processing lighting system parameters, the lighting system parameters including at least one of a position and an orientation relative to the at least one object, a magnitude, a color and a type of at least one lighting source.

25. The method of claim 22, wherein:

the first model comprises at least one of a component model, a stage



model and a static model; and

generating the simulated image further comprises generating the simulated image based on at least one of the component model, the stage model and the static model.

5           26.    The method of claim 25, wherein the stage model represents at least one of a stage table and a movable stage component.

27.    The method of claim 26, wherein the component model includes a representation of at least one of a position and an orientation of the at least one object on the movable stage component.

10          28.    The method of claim 22, wherein the second model characterizes an optical system with an infinite depth of field.

29.    The method of claim 22, further comprising generating at least one inspection program instruction based on the simulated image.

15          30.    The method of claim 22, wherein the at least one inspection program instruction is based upon a user input.

31.    The method of claim 22, further comprising generating at least one control instruction based on the simulated image.

32.    The method of claim 31, wherein generating the at least one control instruction based on the simulated image comprises generating an inspection program.

20          33.    The method of claim 31, wherein generating the at least one control instruction based on the simulated image comprises generating a motion command.

34.    The method of claim 22, further comprising:  
altering at least one of the first and second models based on at least one user input; and

25                modifying the simulated image based on the altered one of the first and second models.

35.    The method of claim 34, further comprising repeating the altering and modifying steps.

30          36.    The method of claim 35, wherein the repeating continues until the simulated image represents a machine vision system state desired by the user.

37. A method for facilitating the generation of at least one machine control instruction for a machine having a machine vision system independently of at least one element of the machine vision system, the method comprising:

5 rendering a synthetic image of at least one object as viewed through the machine vision system based on a representation of at least one component of the machine vision system; and

selecting a machine control instruction based at least in part on the synthetic image.

10 38. The method of claim 37, wherein rendering the synthetic image comprises updating in real-time a view of the at least one object through the simulation of the machine vision system in response to the user altering the representation of the at least one component of the machine vision system.

15 39. The method of claim 37, wherein rendering the synthetic image is based on a depth of focus represented in the representation of the at least one component of the machine vision system.

40. The method of claim 37, further comprising:  
presenting the synthetic image to a user; and  
receiving a user input, wherein selecting the machine control instruction is in response to the user input.

20 41. A method for generating a synthetic image independently of at least one element of a machine vision system, the synthetic image simulating an image from the machine vision system, the method comprising:

initializing a scene of the synthetic image of at least one object as viewed through the machine vision system;

25 adding a workpiece model of at least one workpiece to the scene, the at least one workpiece positioned on a stage of the scene;

obtaining at least one of a position and an orientation of the stage relative to an optical system of the machine vision system; and

30 rendering the scene based on at least one of the characteristics of the optical system and the obtained relative position and orientation of the optical system to generate the synthetic image.

42. The method of claim 41, further comprising:

determining if any lens effects are to be applied to the rendered image;

and

if any lens effects are to be applied, applying the lens effects to the rendered image.

- 5           43.     The method of claim 41, further comprising:
- determining if an external view is to be rendered based on the rendered scene; and
- if the external view is to be rendered, rendering the external view.

ABSTRACT OF THE DISCLOSURE

The systems and methods of this invention provide simulated images to vision inspection systems. The simulated images emulate the vision of a vision inspection system. Graphical models of objects in a virtual world and lens effects models are used to provide the simulated images.

5

10  
15  
20  
25  
30  
35  
40  
45  
50  
55  
60  
65  
70  
75  
80  
85  
90  
95  
100  
105  
110  
115  
120  
125  
130  
135  
140  
145  
150  
155  
160  
165  
170  
175  
180  
185  
190  
195  
200  
205  
210  
215  
220  
225  
230  
235  
240  
245  
250  
255  
260  
265  
270  
275  
280  
285  
290  
295  
300  
305  
310  
315  
320  
325  
330  
335  
340  
345  
350  
355  
360  
365  
370  
375  
380  
385  
390  
395  
400  
405  
410  
415  
420  
425  
430  
435  
440  
445  
450  
455  
460  
465  
470  
475  
480  
485  
490  
495  
500  
505  
510  
515  
520  
525  
530  
535  
540  
545  
550  
555  
560  
565  
570  
575  
580  
585  
590  
595  
600  
605  
610  
615  
620  
625  
630  
635  
640  
645  
650  
655  
660  
665  
670  
675  
680  
685  
690  
695  
700  
705  
710  
715  
720  
725  
730  
735  
740  
745  
750  
755  
760  
765  
770  
775  
780  
785  
790  
795  
800  
805  
810  
815  
820  
825  
830  
835  
840  
845  
850  
855  
860  
865  
870  
875  
880  
885  
890  
895  
900  
905  
910  
915  
920  
925  
930  
935  
940  
945  
950  
955  
960  
965  
970  
975  
980  
985  
990  
995

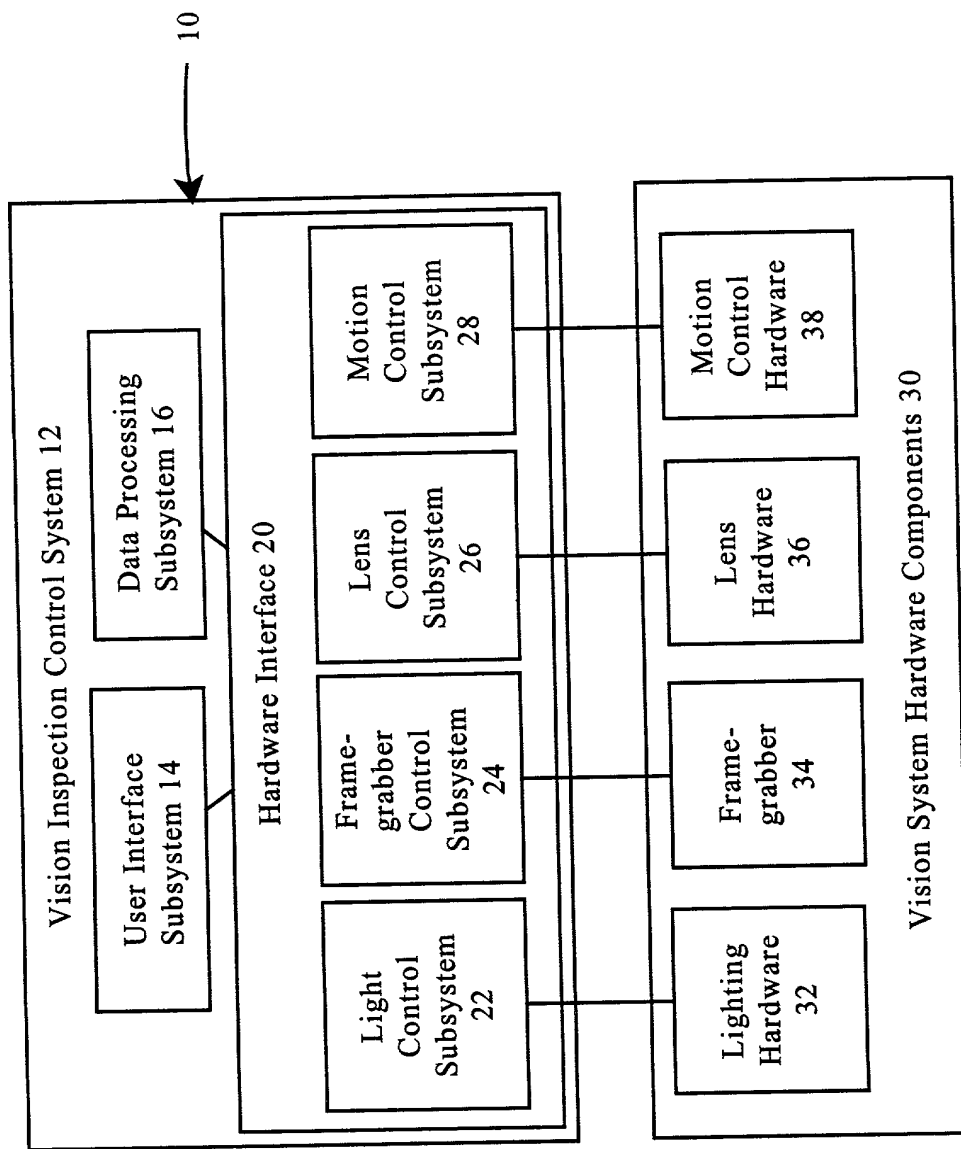


Fig. 1

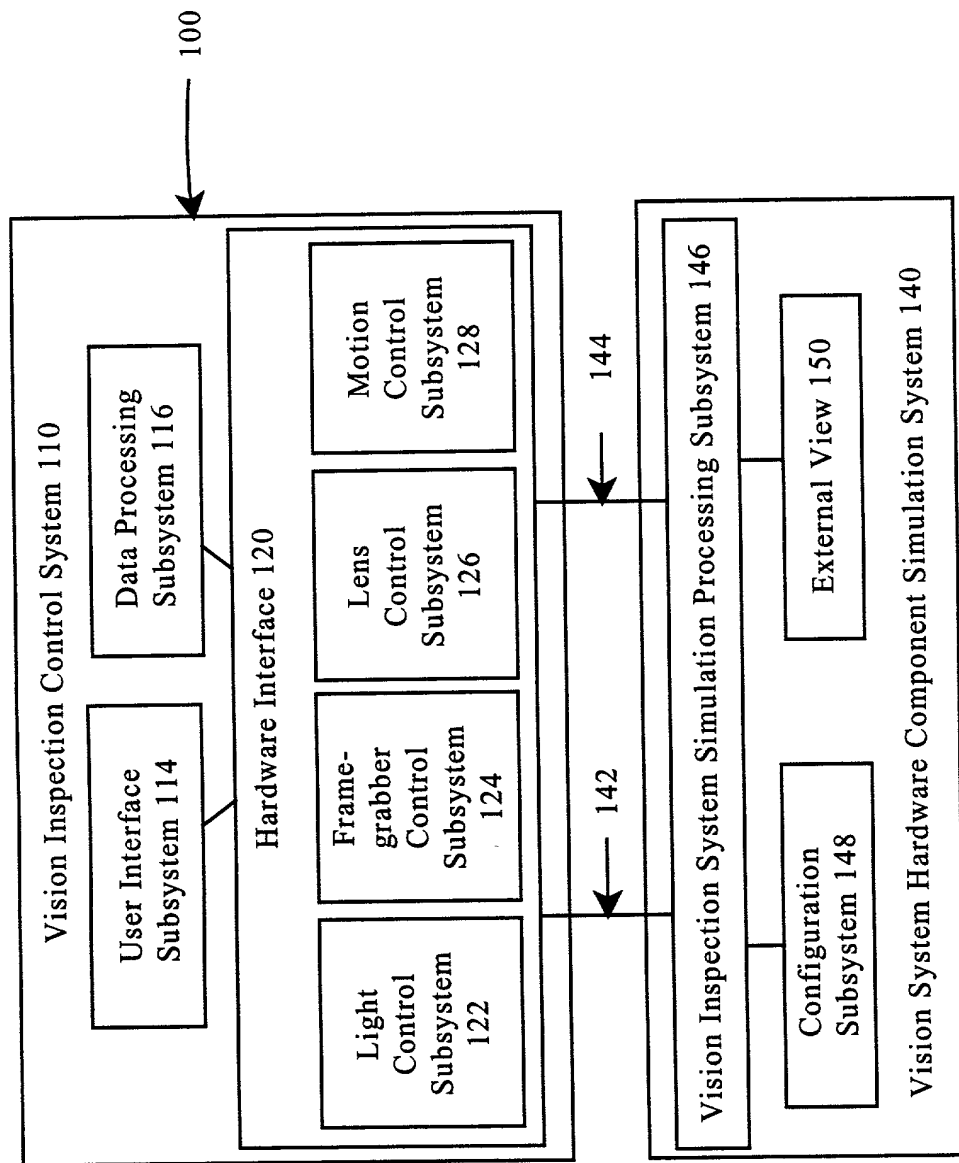


Fig. 2

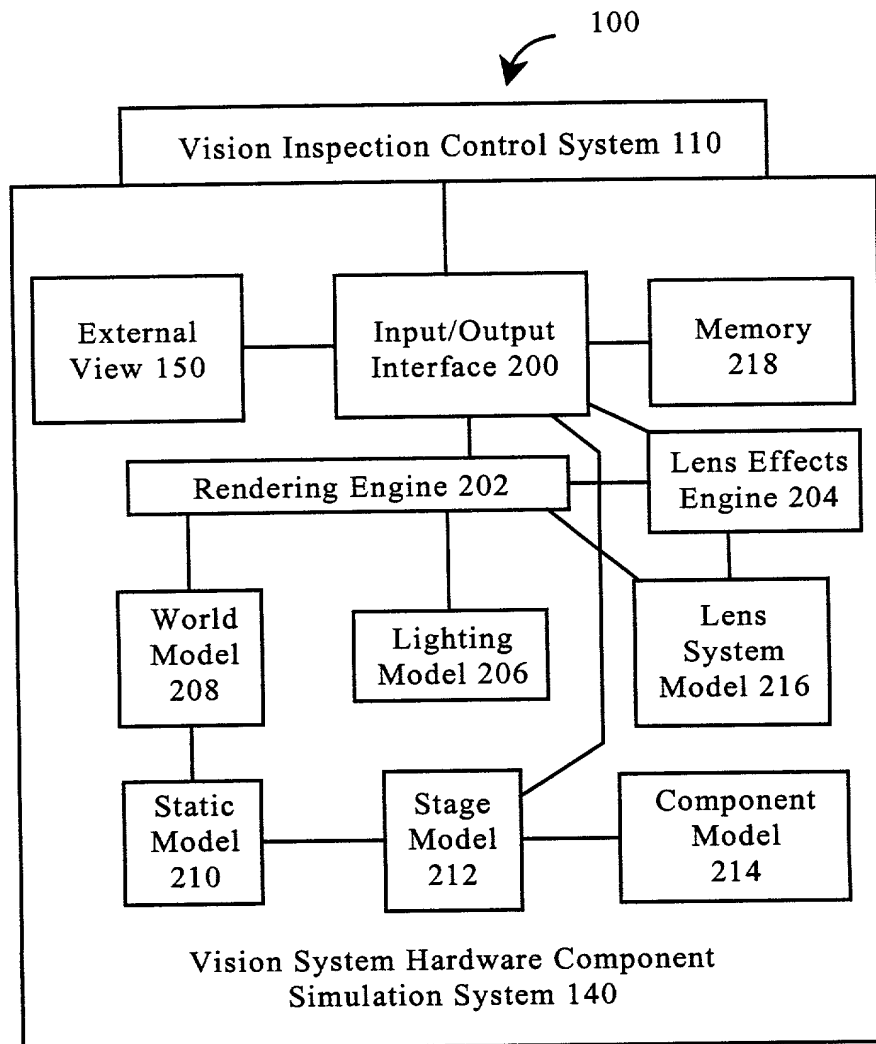


Fig. 3

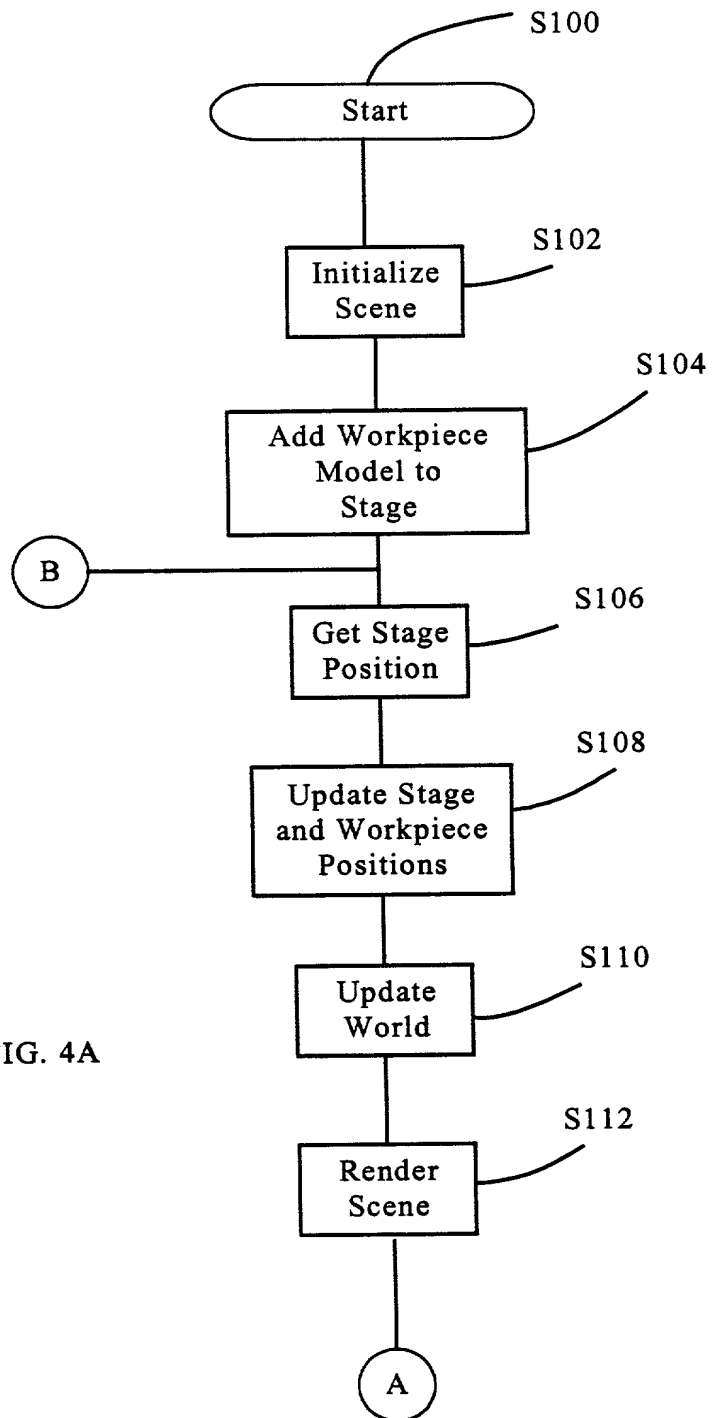


FIG. 4A



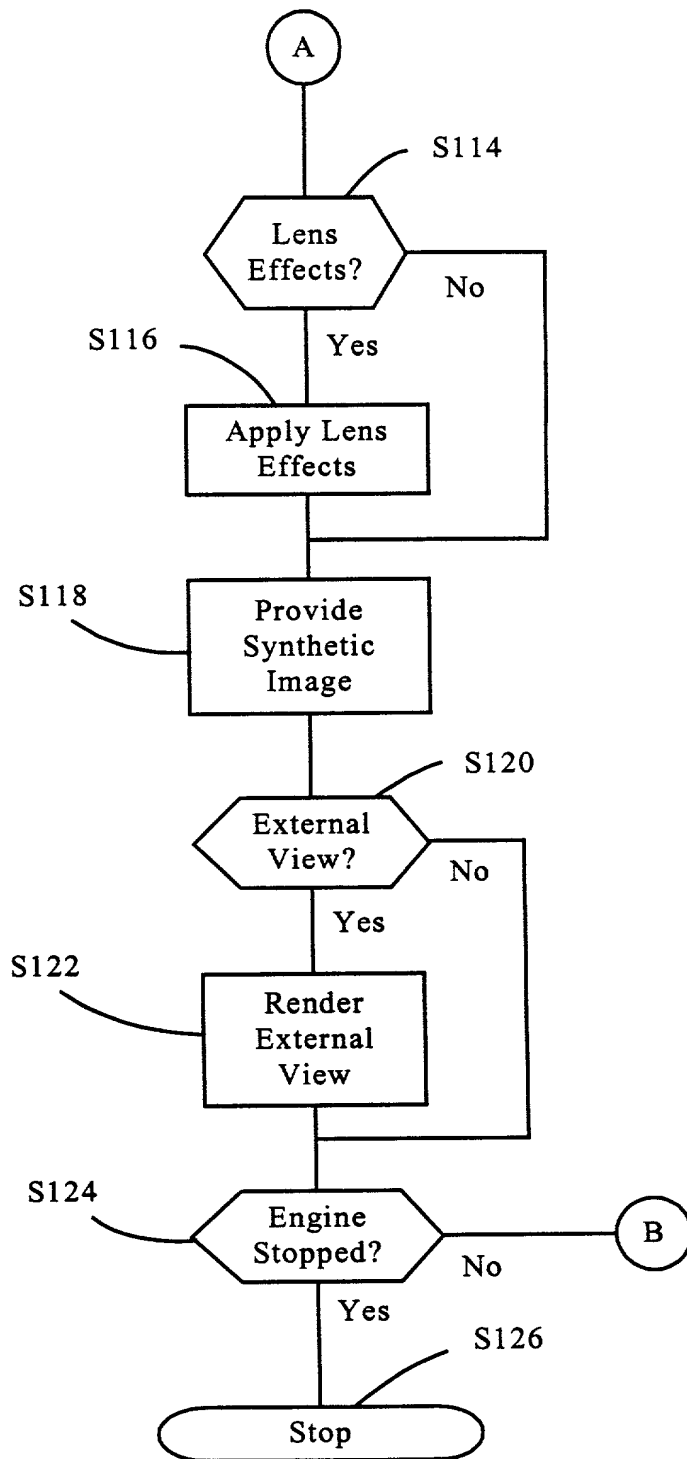


FIG. 4B

Docket No.: 101473

# APPLICATION FOR UNITED STATES PATENT DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

HARDWARE SIMULATION SYSTEMS AND METHODS FOR VISION INSPECTION SYSTEMS

described and claimed in the specification:

Check one

\*a. ☒ attached hereto.

b. ☐ filed on \_\_\_\_\_ as Application No. \_\_\_\_\_ and amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

Under Title 35, U.S. Code §119, the priority benefits of the following foreign application(s) and/or United States provisional application(s) filed within one year prior to this application are hereby claimed:

NONE

The following application(s) for patent or inventor's certificate on this invention were filed in countries foreign to the United States of America either (a) more than one year prior to this application, or (b) before the filing date of the above-named foreign priority application(s) and/or United States provisional application(s):

NONE

I hereby appoint the following as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent Office:

James A. Oliff, Reg. No. 27,075; William P. Berridge, Reg. No. 30,024;  
Kirk M. Hudson, Reg. No. 27,562; Thomas J. Pardini, Reg. No. 30,411;  
Edward P. Walker, Reg. No. 31,450; Robert A. Miller, Registration No. 32,771 and  
Mario A. Costantino, Registration No. 33,565.

**ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO CLIFF & BERRIDGE, P.O. BOX 19928, ALEXANDRIA, VIRGINIA 22320, TELEPHONE (703) 836-6400.**

I hereby declare that I have reviewed and understand the contents of this Declaration, and that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1 **Typewritten Full Name  
of First or Sole Inventor**

Richard	M.	WASSERMAN
Given Name	Middle Initial	Family Name

2 **\*\*Inventor's Signature:**

*Richard M. Wasserman*

3 **\*\*Date of Signature:**

*2/2/99 Feb 2 1999*

Month	Day	Year
-------	-----	------

Residence:	City	State or Province	Country
------------	------	-------------------	---------

Citizenship:	United States of America
--------------	--------------------------

Post Office Address:  
(Insert complete mailing address, including country) 15843 Northeast 83rd Way  
Redmond, WA 98052

\*If Box (a.) is checked, this form may be executed only when attached to the specification (including claims).

\*\*Note to Inventor: Please sign name exactly as it appears above and insert actual date of signing.

IF THERE IS MORE THAN ONE INVENTOR USE PAGE 2 AND PLACE AN "X" HERE ☐

10/96